

AUSTRALIA'S FAVOURITE AIR"

C L A S S I C R A N G E

W A L L

M O U N T E D

STYLISH, SLIM AND ELEGANT I HIGH ENERGY EFFICIENCY I BACKED BY A 5 YEAR FULL PARTS & LABOUR WARRANTY

CLASSIC RANGE

WALL MOUNTED







C O M F O R T &

CLEAN, FILTERED AIR

The Classic Range's standard filter uses static electricity to clean fine particles and dust in the air such as tobacco smoke and plant pollen that are too small to see. The filter contains catechin, highly effective against bacteria growth, creating a safe, clean environment for the entire family.

PEACE OF MIND

Fujitsu believes in the quality and reliability of every air conditioner they sell. This is why we're happy to provide a full 5 year parts and labour warranty across the domestic range.


CONTROLLER OPTIONS

The Classic Range has a variety of controller options, giving you control of your climate at your fingertips. With features such as economy operation, sleep mode, and program timers, you can tailor your comfort needs at the touch of a button.




CLASSIC RANGE

WALL MOUNTED

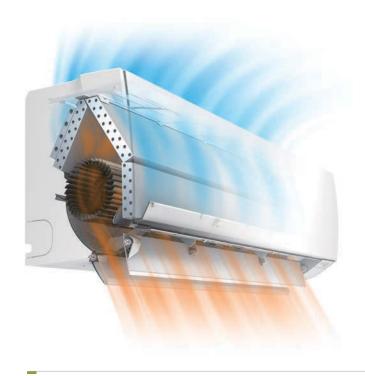

ECONOMY OPERATION

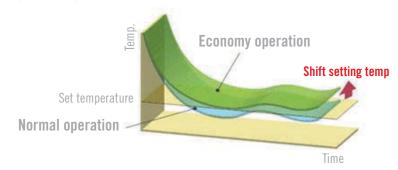



C O M F O R T 8

MODEL RANGE

The Classic range has a number of models across a wide range of capacities, suitable for any room in your home. With both cool only, and reverse cycle systems, and all models containing inverter technology, the Classic range is sure to have a model to suit your comfort needs.

ENERGY EFFICIENT SYSTEMS

The classic range has a number of energy efficient features, helping you reduce power usage. With features such as DC rotary compressors, DC Inverter Control, DC fan motor technologies and programs allowing you to tailor your air conditioning needs, year round comfort has never been more affordable.

ECONOMY OPERATION

The Classic Range's Economy Operation is an energy saving setting that allows the set temperature of the indoor unit to change by 1°C intervals, limiting the maximum energy usage of the air conditioner



CLASSIC RANGE

FEATURES	ASTG30JFCC	ASTG34JFCC	ASTG30LFCC	ASTG34LFC0
Double Swing Automatic Louvres	V	1	√	√
Up/Down Swing Louvres	√.	V	√	V
Automatic air flow adjustment	V	√,	V	√
Auto restart	V	1	V	V
Auto-changeover			√	√
Sleep timer	√	V	V	√
Program timer	V	V	V	V
Washable Panel	V	1	V	V
Blue Fin Heat Exchanger	√	√	V	√
Long-life ion deodorization filter	V	1	√	√
Apple-catechin filter	V	V	V	√



AVAILABLE CONTROLLER OPTIONS







Wired Remote Controller



Simple Remote Controller

SPECIFICATIONS & FEATURES

Products in this brochure contain R410a refrigerant. Please refer to specifications before installation and servicing this product.

Only persons and/or companies qualified and experienced in the installation, service and repair of refrigerant products should be permitted to do so.

The purchaser must ensure that the person and/or company who is to install, service or repair this air conditioner has qualifications and experience in refrigerant products.

Suitable access for warranty and service is required

For future improvement, specifications, designs of product and availability are subject to change without notice. Please check with your dealer.

ALL CAPACITY AND ENERGY EFFICIENCY RATINGS ARE BASED ON AS/NZS3823.2.

COOLING	Indoor temperature Outdoor temperature	27°C DB/19°C WB 35°C DB	
HEATING	Indoor temperature Outdoor temperature	20°C DB 7°C DB/6°C WB	

Running current is at rated conditions (AS3823) and does not include compressor start-up o variations in power supply and load conditions.



Model No.	Indoor unit Outdoor unit		ASTG30LFCC AOTG30LFTC	ASTG34LFCC AOTG34LFTC	ASTG30JFCC AOTG30JFTC	ASTG34JFCC AOTG34JFTC
Model No.						
Operation Type		Reverse Cycle	Reverse Cycle	Cooling Only	Cooling Only	
Power Source	V/I	Ph/HZ	240/1/50	240/1/50	240/1/50	240/1/50
Capacity	Cooling	kW	8.00 (2.9 - 9.0)	9.20 (2.9 - 10.0)	8.00 (2.9 - 9.0)	9.20 (2.9 - 10.0)
	Heating	kW	9.00 (2.2 - 11.0)	10.00 (2.7 - 11.2)	N/A	N/A
Input Power	Cooling	kW	2.42 (0.58 - 3.15)	2.80 (0.59 - 3.54)	2.42 (0.58 - 3.15)	2.80 (0.59 - 3.54)
	Heating	kW	2.64 (0.50 - 3.53)	3.03 (0.60 - 3.57)	N/A	N/A
EER	Cooling	kW/kW	3.31	3.29	3.31	3.29
COP	Heating	kW/kW	3.41	3.30	N/A	N/A
Star Rating	Cooling		2.0	2.0	2.0	2.0
	Heating		2.0	2.0	N/A	N/A
Running Current	Cooling / Heating	Amps	10.2/11.1	11.8/12.8	10.2 - N/A	11.8 - N/A
Moisture Removal		L/Hr	3.2	3.5	3.2	3.5
Noise Level	Indoor Sound Pressure (High / Quiet)	dbA	49/33	52/34	49/33	52/34
	Outdoor Sound Pressure	dbA	53	53	53	53
	Outdoor Sound Power	dbA	69	67	69	67
Air Circulation (Indoor - High Fan)		l/sec	311	347	311	347
Net Dimensions HxWxD	Indoor Unit	mm	320 × 998 × 238	320 × 998 × 238	320 × 998 × 238	320 × 998 × 238
		kgs	14	14	14	14
	Outdoor Unit	mm	830 × 900 × 330	1,290 × 900 × 330	830 × 900 × 330	1,290 × 900 × 330
		kgs	61	86	61	86
Piping Connections (Liquid / Suction)		mm	Ø 9.52 / Ø 15.88	Ø 9.52 / Ø 15.88	Ø 9.52 / Ø 15.88	Ø 9.52 / Ø 15.88
Max. Pipe Length (Precharged Length)		m	50/20	50/20	50/20	50/20
Max Height Difference		m	30	30	30	30
Operation Range	Cooling	°CDB	-10 to 46	-5 to 46	-10 to 46	-5 to 46
	Heating	°CDB	-15 to 24	-15 to 24	N/A	N/A
Refrigerant			R410A	R410A	R410A	R410A

